

**DSV-50 SERIES, 50WATT, 2:1 INPUT RANGE**
**FEATURES:**

- ✓ 3 year warranty
- ✓ Six-side shielded metal case
- ✓ Low ripple and noise
- ✓ Over current and short circuit protection
- ✓ Remote on/off
- ✓ Adjustable output voltage



Model	Input voltage (Vdc)	Output voltage (Vdc)	Output current (A)	Efficiency Typ.
DSV50-1211		5	10	80%
DSV50-1212	12(9~18)	12	4.2	85%
DSV50-1213		15	3.3	85%
DSV50-1214		24	2.1	85%
DSV50-2411		5	10	80%
DSV50-2412	24(18~36)	12	4.2	85%
DSV50-2413		15	3.3	85%
DSV50-2414		24	2.1	85%
DSV50-4811		5	10	80%
DSV50-4812	48(36~72)	12	4.2	85%
DSV50-4813		15	3.3	85%
DSV50-4814		24	2.1	85%
DSV50-11011		5	10	80%
DSV50-11012	110(72~144)	12	4.2	85%
DSV50-11013		15	3.3	85%
DSV50-11014		24	2.1	85%

**Notes:**

1. Other input and output models may available on request;
2. Above models are default to metal case and with heatsink, plus "R" in the suffix.

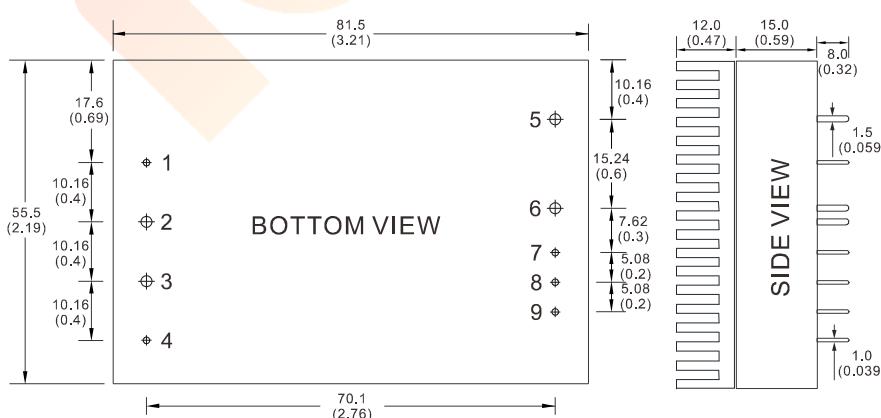
**ELECTRICAL**

Input voltage range	12V 24V 48V 110V	9-18Vdc 18-36Vdc 36-72Vdc 72-144Vdc
Remote control (Low level remote)	High level or vacant Low level or connect ground	Turn on Turn off
Output voltage accuracy	---	±1
Output voltage adjustable	---	±10% max.
Line regulation	Nominal Load, full voltage	±0.2%

**DSV-50 SERIES, 50WATT, 2:1 INPUT RANGE**
**ELECTRICAL**

Load regulation	20% ~ 100% rated load	±0.5%
Dynamic response (transient/recovery time)	5%-50%-75% load capability	$\Delta V_{o1}/\Delta t: \pm 4.0\%/500\mu s$
Ripple and noise	20MHz BM, full load	$V_o \leq 5.0V, \leq 50mVp-p$ $V_o \geq 48V, \leq 180mVp-p$ Other, $\leq 100mVp-p$
Isolation voltage (<2mA/min)	Input to output	1500Vdc
	Input to case	500Vdc
Switching frequency	300KHz	300KHz max.
Turn-on delay time	---	≤200ms
Operating temperature range	Free air	-25°C to +55°C
Storage temperature range	---	-45°C to +105°C
Input under voltage protection	When input voltage is lower than the low input voltage	Auto-recovery
Over current protection	---	Auto-recovery
Short circuit protection	---	Continuous auto-recovery
Relative humidity	---	10%-90% max.
Weight	---	152.7g
MTBF	Bellcore TR-332, 25°C	2x10 <sup>5</sup> Hrs

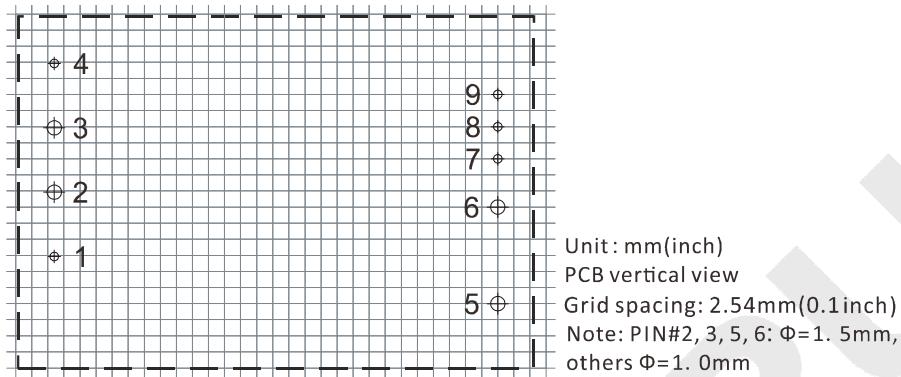
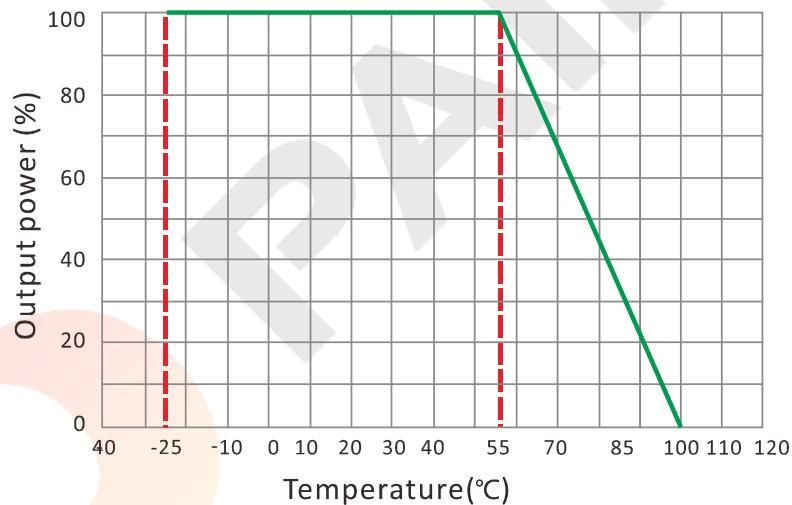
**Notes:** Unless otherwise specified, all the parameters of the test conditions are as follows: ambient temperature 25°C, the nominal input voltage, pure resistive nominal load.

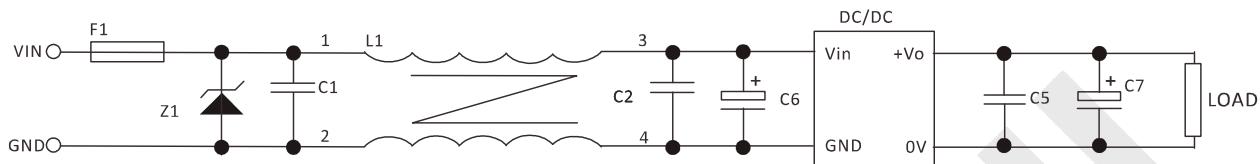
**MECHANICAL**

**CONNECTION**

PIN #	SINGLE
1	FG
2	+Vin
3	-Vin
4	REM
5	+Vo
6	GND
7	+S
8	TRIM
9	-S

Note:

\* Unit is mm(inch).

**DSV-50 SERIES, 50WATT, 2:1 INPUT RANGE****MECHANICAL****LAYOUT****TEMPERATURE PROFILE**

**DSV-50 SERIES, 50WATT, 2:1 INPUT RANGE**
**NOTES**
**RECOMMENDED TEST AND APPLICATION CIRCUIT**


1. TVS&FUSE be helpful with over voltage protection and inrush limiting. Recommended FUSE better be 1.5~2times of the rated current.
2. The input filter capacitor C6 could select the aluminum electrolytic capacitors or tantalum capacitors, and the withstand voltage should be greater than the highest input voltage. Recommended capacitor should be between 22μF~100μF.
3. C1,C2 for the input filter capacitor,0.1~1μF high-frequency ceramics capacitor or chip capacitor are recommended. The withstand voltage of output filter C5, C7 should be greater than the highest output voltage. Recommended capacitor of C7 better within 100μF and C5 connected with the chip to reduce the input voltage peak, recommended 0.1~1μF high-frequency ceramics capacitor or chip capacitor.