



Specifications

Constant Current LED Power Supplies Professional Series -PEAH, 30W

2020

PAIRUI ELECTRONICS

No. 545 Museum Road
Yangzhou, Jiangsu
China 225009

Tel: 86 (514) 8279 1592

Fax: 86 (514) 8769 3159

LED Power Supplies for Indoor Use

PEAH SERIES, 30WATT, IP20 RATING

Features

- 5 Years Warranty
- High Input Voltage Range: 220~240Vac
- Constant Current Output Mode
- Waterproof Rating IP20
- Optional 277VAC long term service
- Short Circuit, Over Load, No-load, Over temperature Protections
- Class II Power, no FG



Applications

- ✓ Panel Light
- ✓ Down Light
- ✓ Recessed Light
- ✓ Cabinet Light
- ✓ Other Indoor used Lights

Electrical

Part Number	Output Power	Output Current	Output Voltage	Efficiency	Certificate
PEAH030C0300NSLPA2	28.5W	300mA	70-95V	86%	CCC, CE, TUV, SAA
PEAH030C0350NSLPA2	26.6W	350mA	50-76V	86%	CCC, CE, TUV, SAA
PEAH030C0400NSLPA2	30.4W	400mA	50-76V	86%	CCC, CE, TUV, SAA
PEAH030C0500NSLPA2	27.5W	500mA	40-55V	86%	CCC, CE, TUV, SAA
PEAH030C0550NSLPA2	30.3W	550mA	40-55V	86%	CCC, CE, TUV, SAA
PEAH030C0650NSLPA2	27.3W	650mA	27-42V	86%	CCC, CE, TUV, SAA
PEAH030C0700NSLPA2	29.4W	700mA	27-42V	86%	CCC, CE, TUV, SAA

NOTE: Other output models are may available on request.

INPUT

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Rated Input Voltage		220		240	VAC
Range Of Input Voltage		198		264	VAC
Frequency		50		60	Hz
Input Current	198VAC, full load			0.18	A
Input Power	230VAC, full load			35.4	W
Power factor(PF)	230VAC, full load	0.95			
No-Load Power Consumption				1	W
THD	198VAC, full load			20	%

OUTPUT

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Current Accuracy			±5		%
Max. Output Power				30.4	W
Started Delay Time	230VAC, full load			0.5	s
Current Ripple				±3	%

Protection

Short circuit	Auto Recovery
Over load	Auto Recovery
No-load	Auto Recovery
Insulation voltage	I/P to O/P,3KVac/1min
Insulation resistance	>100M ohm/500VDC
Leakage current	I/P to O/P <0.75mA

Environment

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Ta/Operation Temperature		-25		50	°C
Ts/Storage Temperature		-40		85	°C
Tc/Enclosure Temperature				90	°C
Humidity		10		90	%RH

Construction

Connection Method	Amphenol connector
Installation	Independent external
Output amphenol connector specification	CS200-00-350-02P-15-01AH/CS200-00-350-0 4P-15-00AH
Input amphenol connector specification	CS200-00-350-02P-1Y-108AH/CS200-00-350-04P-1Y-210
Dimension	124*41*28mm

Others

RoHS	Complied to 2011/65/EU
Life Time	30000h @50°C(Ta)/85°C(Tc)
Warranty	5years


Standards

Safety Standards	EN61347-1:2015, EN61347-2-13:2014/A1:2017, EN62493:2015, AS/NZS IEC61347.2.13:2013, AS/NZS 61347.1:2016, GB19510.1-2009
EMC Standards	EN55015:2013/A1:2015, EN61000-3-2:2014, EN61000-3-3:2013, EN61547:2009, GB/T17743.2017
Surge	L-N/2KV

Remark:

1. Unless otherwise specified, all specification parameters are measured at input voltage of 230VAC, rated load and ambient temperature of 25°C.
2. Power supply is considered as a component and used in combination with terminal equipment, because EMC is affected by the whole set of equipment, the manufacturer of terminal equipment needs to re-emc confirm the whole set of equipment.

Mechanical

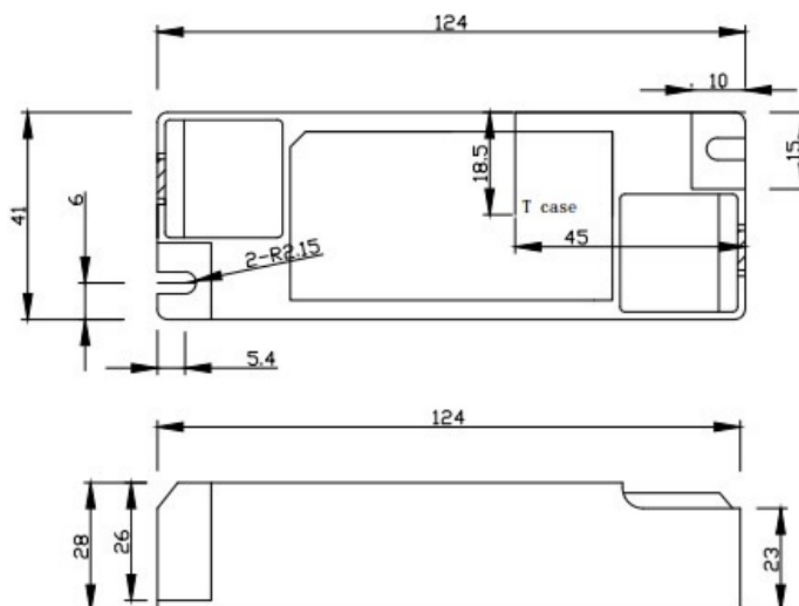

Packing information

Carton L*W*H(mm)	Pcs Carton	Net weight Pcs(kg)	Net weight Carton(kg)	Gross weight Carton(kg)
620*260*185	120	0.1	12	13.5

Electrical Curve

